

IP Rating: IP66
 Dimmable: 0-10V Dimmable(Optional)
 Input Voltage: 100-300VAC, 347-480VAC
 CCT: 3000K/4000-4500K / 5000K/5700K/6500K
 Beam Angle: 45° / 90° / 120°
 Light Source: 60pcs SMD 3030

Item No.	Luminous Flux	Input Voltage	Replacement	CRI	PF	Meanwell Driver	Dimensions	Weight
LSLBL-50WXY	6000 Lumen	100-300VAC 347-480VAC 50/60Hz	105-125W Metal Halide HPS	>70	>0.95	HLG-60H-36A	L*W*H: 330*102*201mm 11.93**4.02**7.91'	2.0Kg



IP Rating: IP65
 Dimmable: 0-10V Dimmable(Optional)
 Input Voltage: 100-300VAC, 347-480VAC
 CCT: 3000K/4000-4500K / 5000K/5700K/6500K
 Beam Angle: 45° / 90° / 120°
 Light Source: 120pcs SMD 3030

Item No.	Luminous Flux	Input Voltage	Replacement	CRI	PF	Meanwell Driver	Dimensions	Weight
LSLBL-80WXY	11400 Lumen	100-300VAC 347-480VAC 50/60Hz	150-200W Metal Halide/HPS	>70	>0.95	HLG-80H-36A	L*W*H: 330*172*201mm 11.93**6.77**7.91'	2.85Kg
LSLBL-100WXY-A	12500 Lumen		200-250W Metal Halide/HPS			HLG-100H-36A		



IP Rating: IP66
 Dimmable: 0-10V Dimmable(Optional)
 Input Voltage: 100-300VAC, 347-480VAC
 CCT: 3000K/4000-4500K / 5000K/5700K/6500K
 Beam Angle: 45° / 90° / 120°
 Light Source: 120pcs SMD 3030

Item No.	Luminous Flux	Input Voltage	Replacement	CRI	PF	Meanwell Driver	Dimensions	Weight
LSLBL-100WXY-B	12500 Lumen	100-300VAC 347-480VAC 50/60Hz	200-250W Metal Halide/HPS	>70	>0.95	HLG-100H-36A	L*W*H: 583*172*201mm 22.95**6.77**7.91'	2.85Kg



LED FLAT HIGH BAY LIGHT/LED LOW BAY LIGHT/LED TUNNEL LIGHT/LED HIGH MAST LIGHT



IP Rating: IP66 Dimmable: 0-10V Dimmable(Optional)
 Input Voltage: 100-300VAC, 347-480VAC CCT: 3000K/4000-4500K / 5000K/5700K/6500K
 Beam Angle: 45° / 90° / 120° Light Source: 180pcs SMD 3030

Item No.	Luminous Flux	Input Voltage	Replacement	CRI	PF	Meanwell Driver	Dimensions	Weight
LSLBL-120WXY	16000 Lumen	100-300VAC 347-480VAC 50/60Hz	250-300W Metal Halide HPS	>70	>0.95	HLG-120H-36A	L*W*H: 330*258*201mm 11.93**10.16**7.91'	3.8Kg



LCP



IP Rating: IP66 Dimmable: 0-10V Dimmable(Optional)
 Input Voltage: 100-300VAC, 347-480VAC CCT: 3000K/4000-4500K / 5000K/5700K/6500K
 Beam Angle: 45° / 90° / 120° Light Source: 240pcs SMD 3030

Item No.	Luminous Flux	Input Voltage	Replacement	CRI	PF	Meanwell Driver	Dimensions	Weight
LSLBL-150WXY	20000 Lumen	100-300VAC 347-480VAC 50/60Hz	350-400W Metal Halide HPS	>70	>0.95	HLG-150H-36A	L*W*H: 330*344*201mm 11.93**13.54**7.91'	5.3Kg



LCP



IP Rating: IP66 Dimmable: 0-10V Dimmable(Optional)
 Input Voltage: 100-300VAC, 347-480VAC CCT: 3000K/4000-4500K / 5000K/5700K/6500K
 Beam Angle: 45° / 90° / 120° Light Source: 300pcs SMD 3030

Item No.	Luminous Flux	Input Voltage	Replacement	CRI	PF	Meanwell Driver	Dimensions	Weight
LSLBL-180WXY	24000 Lumen	100-300VAC 347-480VAC 50/60Hz	400-450W Metal Halide/HPS	>70	>0.95	HLG-185H-36A	L*W*H: 330*430*201mm 11.93**16.93**7.91'	5.8Kg
LSLBL-200WXY	26500 Lumen		500W Metal Halide/HPS			HLG-240H-36A		



LCP





IP Rating: IP66 Dimmable: 0-10V Dimmable(Optional)
 Input Voltage: 100-300VAC, 347-480VAC CCT: 3000K/4000-4500K / 5000K/5700K/6500K
 Beam Angle: 45° / 90° / 120° Light Source: 360pcs SMD 3030

Item No	Luminous Flux	Input Voltage	Replacement	CRI	PF	Meanwell Driver	Dimensions	Weight
LSLBL-240WXY	32000 Lumen	100-300VAC 347-480VAC 50/60Hz	600W Metal Halide HPS	>70	>0.95	HLG-240H-36A	L*W*H: 583*258*201mm 22.95**10.16**7.91"	8.5Kg



IP Rating: IP66 Dimmable: 0-10V Dimmable(Optional)
 Input Voltage: 100-300VAC, 347-480VAC CCT: 3000K/4000-4500K / 5000K/5700K/6500K
 Beam Angle: 45° / 90° / 120° Light Source: 480pcs SMD 3030

Item No.	Luminous Flux	Input Voltage	Replacement	CRI	PF	Meanwell Driver	Dimensions	Weight
LSLBL-320WXY	42500 Lumen	100-300VAC 347-480VAC 50/60Hz	1000W Metal Halide/HPS	>70	>0.95	HLG-320H-36A	L*W*H: 583*344*201mm 22.95**13.54**7.91"	9.3Kg
LSLBL-400WXY	48000 Lumen		1500W Metal Halide/HPS			2*HLG-240H-36A		




IP Rating: IP66 Dimmable: 0-10V Dimmable(Optional)
 Input Voltage: 100-300VAC, 347-480VAC CCT: 3000K/4000-4500K / 5000K/5700K/6500K
 Beam Angle: 45° / 90° / 120° Light Source: 600pcs SMD 3030

Item No.	Luminous Flux	Input Voltage	Replacement	CRI	PF	Meanwell Driver	Dimensions	Weight
LSLBL-500WXY	60000 Lumen	100-300VAC 347-480VAC 50/60Hz	2000W Metal Halide HPS	>70	>0.95	2*HLG-240H-36A	L*W*H: 583*516*201mm 22.95**20.31**7.91"	10.65Kg



LED FLAT HIGH BAY LIGHT/LED LOW BAY LIGHT/LED TUNNEL LIGHT/LED HIGH MAST LIGHT

Energy efficient alternatives to traditional HID and fluorescent fixtures for cost-conscious applications

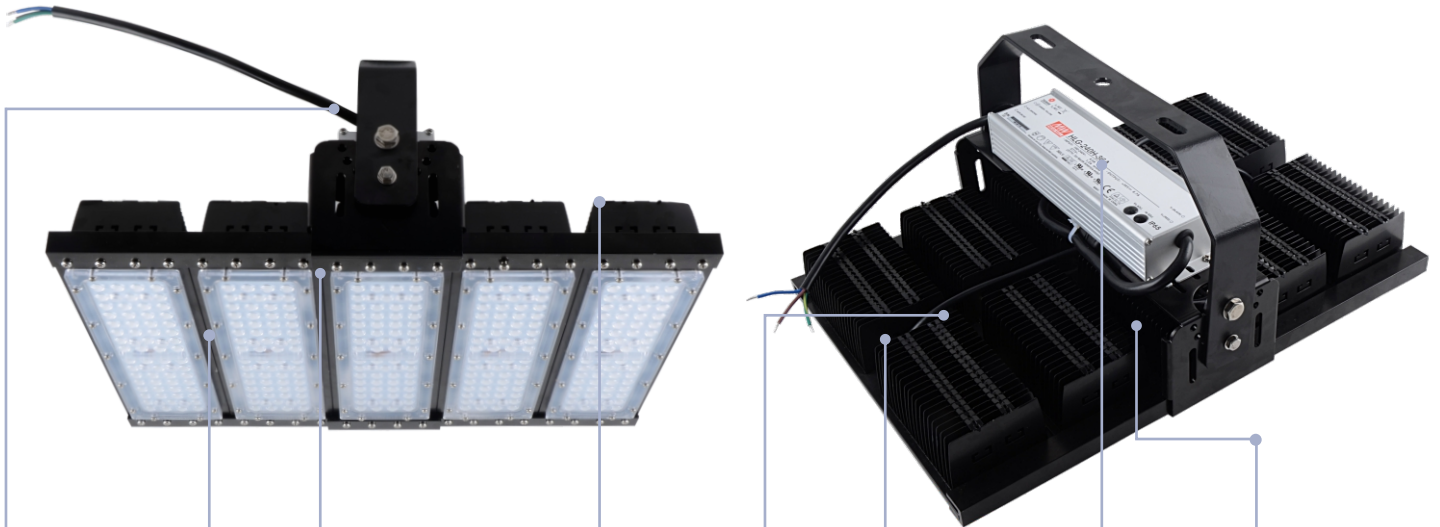

Superior LEDs

3030 SMD LEDs with high efficacy up to 133 Lm/W.
Beam Angle 45° or 90° and 120°



Pleasing Lighting

excellent fixture to- fixture spacing in either 3000K 4000K or 5000K and 5700K 6500K standard color temperatures.



Quality Construction

6 year system warranty
ETL TUV SAA C-tick LCP RoHS Certifications



Fin aluminum heat

Unique appearance with innovative modular fin heatsink design.



Meanwell power supply

UL Certified Lised IP66 HLG Series
support 100-277VAC, 347v, and 480v inputs.



Mounting Options

Single and Double Hang Ring Pendant Mount and Plate Mount for easy installation



Energy Efficiency

Tiny package and lighter, lower freight cost more competitive in the market



Low Maintenance

Essentials fixtures require virtually no maintenance. LED modules and power supplies are easily replaced if needed.