


- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC,50/60Hz
- COLOR TEMP 2700K ~ 6500K




Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
18W	LSPL3060-18W-160S4	160pcs 3014 SMD	1400Lm	>80	>0.9	IP44	L 300 × W600 × H12.5
25W	LSPL3060-25W-220S4	220pcs 3014 SMD	1660Lm	>80	>0.9	IP44	L 300 × W600 × H12.5
30W	LSPL3060-30W-280S4	280pcs 3014 SMD	2300Lm	>80	>0.9	IP44	L 300 × W600 × H12.5

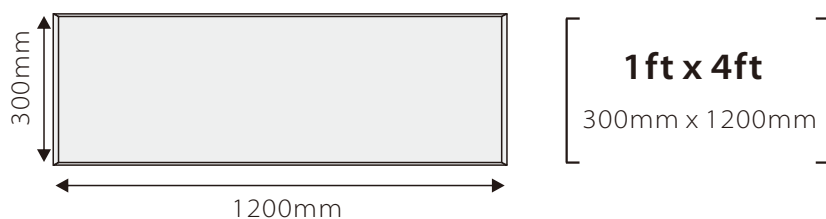

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC,50/60Hz
- COLOR TEMP 2700K ~ 6500K




Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
40W	LSPL30120-40W-340S4	340pcs 3014 SMD	2900 - 3200Lm	>80	>0.9	IP44	L 300 × W1200 × H12.5
48W	LSPL30120-48W-440S4	440pcs 3014 SMD	3950Lm	>80	>0.9	IP44	L 300 × W1200 × H12.5
55W	LSPL30120-55W-500S4	500pcs 3014 SMD	4000 - 4500Lm	>80	>0.9	IP44	L 300 × W1200 × H12.5
65W	LSPL30120-65W-600S4	600pcs 3014 SMD	4800 - 5300Lm	>80	>0.9	IP44	L 300 × W1200 × H12.5

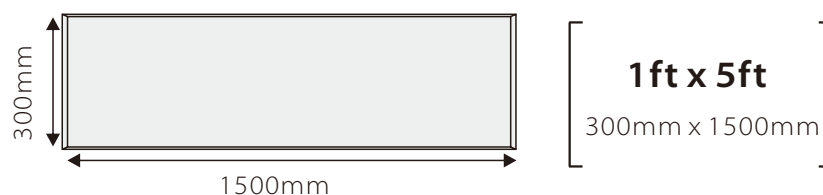

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC,50/60Hz
- COLOR TEMP 2700K ~ 6500K




Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
48W	LSPL30150-48W-440S4	440pcs 3014 SMD	3900Lm	>80	>0.9	IP44	L 300 × W1500 × H12.5

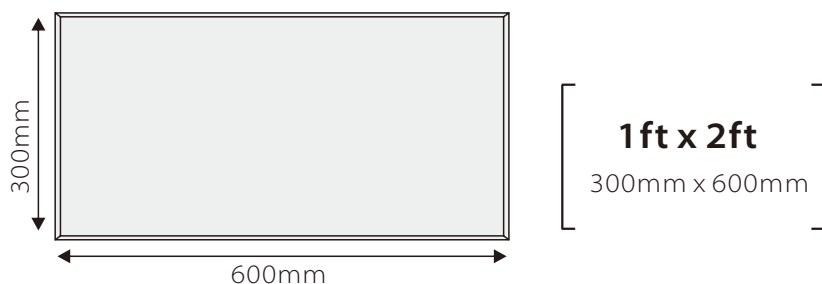

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC,50/60Hz
- COLOR TEMP 2700K ~ 6500K




Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
18W	LSPL3060-18W-160S4	160pcs 3014 SMD	1400Lm	>80	>0.9	IP44	L 300 × W600 x H12.5
25W	LSPL3060-25W-220S4	220pcs 3014 SMD	1660Lm	>80	>0.9	IP44	L 300 × W600 x H12.5
30W	LSPL3060-30W-280S4	280pcs 3014 SMD	2300Lm	>80	>0.9	IP44	L 300 × W600 x H12.5

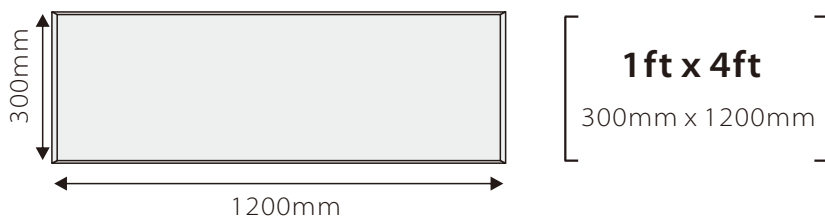

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC,50/60Hz
- COLOR TEMP 2700K ~ 6500K




Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
40W	LSPL30120-40W-340S4	340pcs 3014 SMD	2900 - 3200Lm	>80	>0.9	IP44	L 300 × W1200 x H12.5
48W	LSPL30120-48W-440S4	440pcs 3014 SMD	3950Lm	>80	>0.9	IP44	L 300 × W1200 x H12.5
55W	LSPL30120-55W-500S4	500pcs 3014 SMD	4000 - 4500Lm	>80	>0.9	IP44	L 300 × W1200 x H12.5
65W	LSPL30120-65W-600S4	600pcs 3014 SMD	4800 - 5300Lm	>80	>0.9	IP44	L 300 × W1200 x H12.5

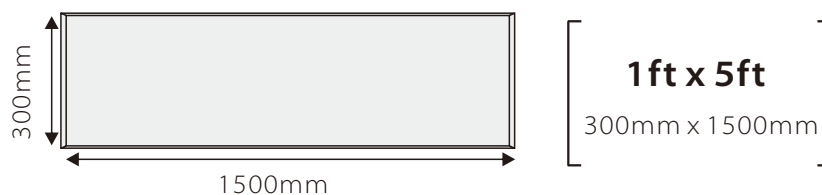

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC,50/60Hz
- COLOR TEMP 2700K ~ 6500K



Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
48W	LSPL30150-48W-440S4	440pcs 3014 SMD	3900Lm	>80	>0.9	IP44	L 300 × W1500 x H12.5

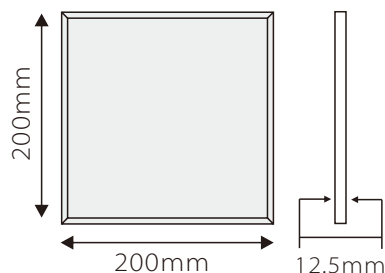


7.9" x 7.9"
200mm x 200mm

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC, 50/60Hz
- COLOR TEMP 2700K ~ 6500K



Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
12W	LSPL2020-12W-100S4	100pcs Lumenmax 3014 SMD	750 - 800Lm	>80	>0.9	IP44	L 200 x W200 x H12.5

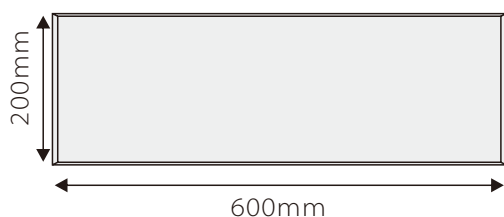


23.6" x 7.9"
600mm x 200mm

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC, 50/60Hz
- COLOR TEMP 2700K ~ 6500K



Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
18W	LSPL2060-18W-160S4	160pcs Lumenmax 3014 SMD	1260Lm	>80	>0.9	IP44	L 200 x W200 x H12.5

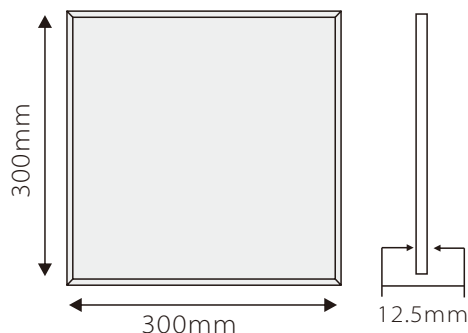


1ft x 1ft
300mm x 300mm

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC, 50/60Hz
- COLOR TEMP 2700K ~ 6500K



Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
12W	LSPL3030-12W-100S4	100pcs 3014 SMD	700-850Lm	>80	>0.9	IP44	L 300 x W300 x H12.5
18W	LSPL3030-18W-160S4	160pcs 3014 SMD	1400Lm	>80	>0.9	IP44	L 300 x W300 x H12.5

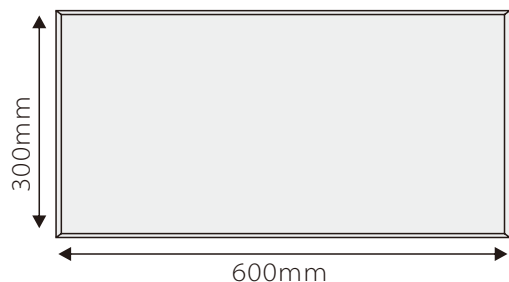


1 ft x 2ft
300mm x 600mm

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC,50/60Hz
- COLOR TEMP 2700K ~ 6500K



Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
18W	LSPL3060-18W-160S4	160pcs 3014 SMD	1400Lm	>80	>0.9	IP44	L 300 x W600 x H12.5
25W	LSPL3060-25W-220S4	220pcs 3014 SMD	1660Lm	>80	>0.9	IP44	L 300 x W600 x H12.5
30W	LSPL3060-30W-280S4	280pcs 3014 SMD	2300Lm	>80	>0.9	IP44	L 300 x W600 x H12.5

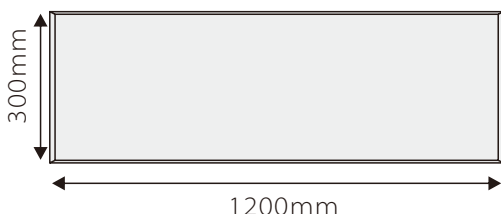


1 ft x 4ft
300mm x 1200mm

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC,50/60Hz
- COLOR TEMP 2700K ~ 6500K



Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
40W	LSPL30120-40W-340S4	340pcs 3014 SMD	2900 - 3200Lm	>80	>0.9	IP44	L 300 x W1200 x H12.5
48W	LSPL30120-48W-440S4	440pcs 3014 SMD	3950Lm	>80	>0.9	IP44	L 300 x W1200 x H12.5
55W	LSPL30120-55W-500S4	500pcs 3014 SMD	4000 - 4500Lm	>80	>0.9	IP44	L 300 x W1200 x H12.5
65W	LSPL30120-65W-600S4	600pcs 3014 SMD	4800 - 5300Lm	>80	>0.9	IP44	L 300 x W1200 x H12.5

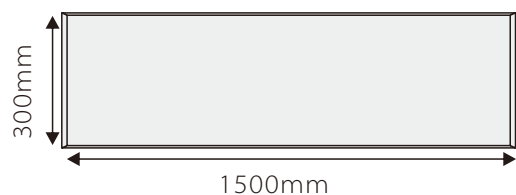

1 ft x 5ft
300mm x 1500mm

- LUMINOUS EFFICIENCY >75lm/w
- BEAM ANGLE 160 degree
- INPUT VOLTAGE 85~265VAC,50/60Hz
- COLOR TEMP 2700K ~ 6500K



Watts	Item No	Light Source	Luminous Flux	CRI	PF	IP Rating	Dimensions (mm)
48W	LSPL30150-48W-440S4	440pcs 3014 SMD	3900Lm	>80	>0.9	IP44	L 300 x W1500 x H12.5