




Patent number:  
ZL 2015 2 0043622.2



30W

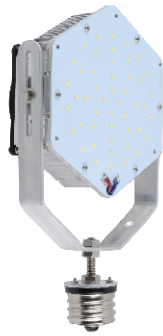


45W




60W




80W

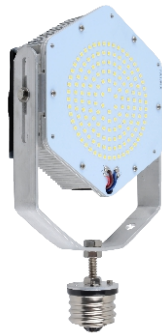

100W

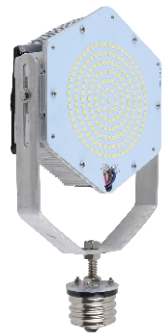

120W


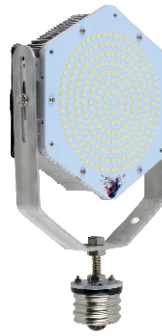


150W

Luminous	3900 Lumen	5900 Lumen	7800 Lumen	11400 Lumen	13000 Lumen	16000 Lumen	20000 Lumen
LED Quantity	48 PCS	72 PCS	96 PCS	133 PCS	161 PCS	196 PCS	245 PCS
Equivalent	105W SON/HPS	125W SON/HPS	175W SON/HPS	250W SON/HPS	300W SON/HPS	350W SON/HPS	400W SON/HPS
Item NO.	LSRK-30WXY	LSRK-45WXY	LSRK-60WXY	LSRK-80WXY	LSRK-100WXY	LSRK-120WXY	LSRK-150WXY
Voltage	100-300VAC, 347-480V 50/60Hz						
Base Options	E40/E39(mogul) E27/E26(Medium)						
Beam Angle	120 Degree						
LED Brand	SMD 3030						
Power factor	>0.95						
CCT	3000K/4000-4500K/5000-5700K/6000-6500K						
CRI	>80						
Material	External Meanwell Driver + Fin heat sink						
Certified	ETL cETL TUV CE RoHS SAA FCC DLC Ctick certified <b>LCP</b>						
Dimmable	YES						
Warranty	5 year Warranty						
Rotatable	Arm rotatable and length adjustable						
Driver Power	UL listed Meanwell Driver						
LED Lifetime	50,000 Hours						
Working Tempe Humidity	-45 to + 50 Deg C / @Ta=25 Deg C						

Note: all specifications subject to change without notice.





01 Outer Dimension

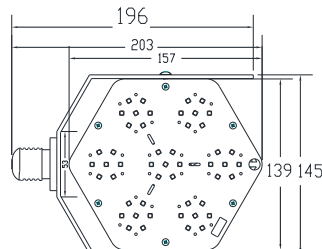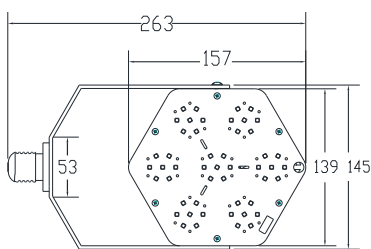

Unit:mm

E27 E26 shortest size	9.05" * 5.47"
E27 E26 longest size	11.8" * 5.47"
E40 E39 shortest size	9.84" * 5.47"
E27 E26 longest size	12.59" * 5.47"


E40 LED RETROFIT KITS 30W-150W

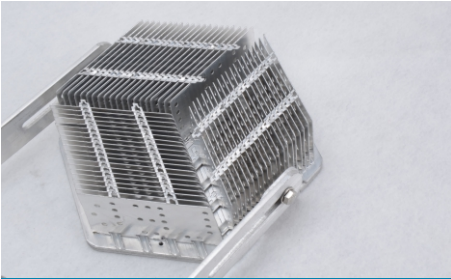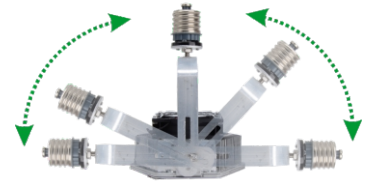

6S Aluminum fin heat sink




SUNON Fan

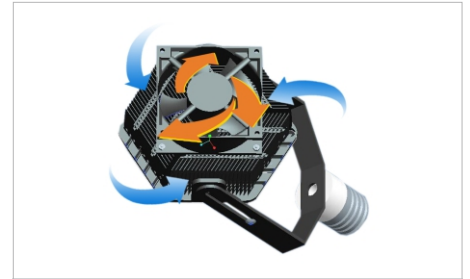


Heat pulling dissipation method

02 Accessories

1. When you are using this led retrofit kit in the canopy, wall pack and parking lot shoebox fixture you may need a kit to have the driver fixed ( Pic 1 )
2. When you have less space to put a lamp with E26 or E39 base, you may choose to use the arm fixed kit ( Pic 2 )
3. When your traditional fixture has a E40 lamp socket, you may need an adaptor ( Pic 3 )

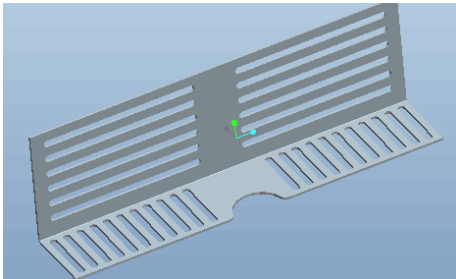





DRIVER FIXED KIT (Pic1)

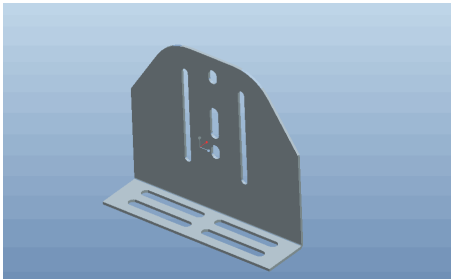

ARM FIXED KIT (Pic2)



LAMP CAP ADAPTOR (Pic3)

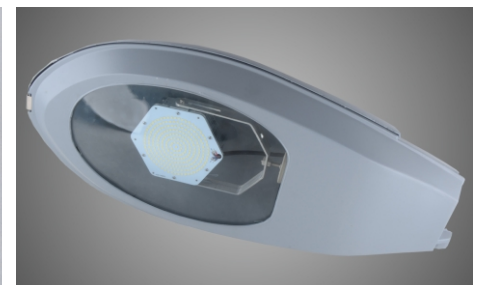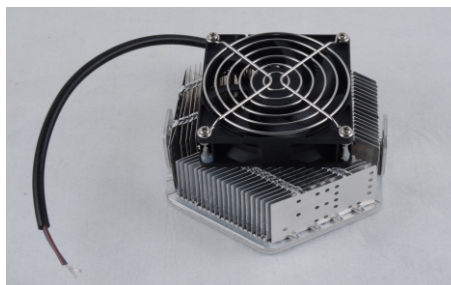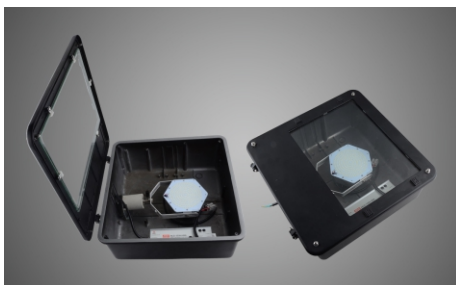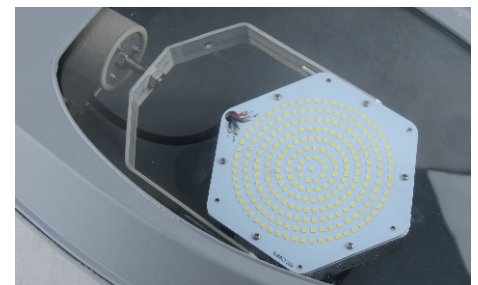

E40 LED RETROFIT KITS 30W-150W